


Conference Clip Microphone TMD/CL

Article No.: 01.0750

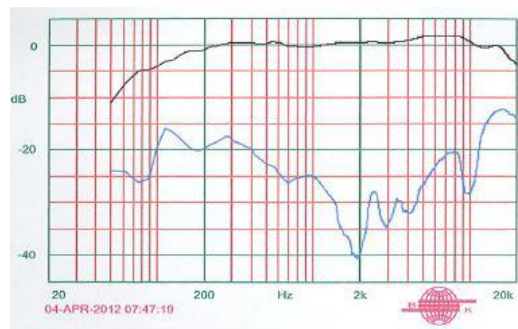

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without notice.

Description

Professional clip microphone for use with BRÄHLER conference units.

An illuminated LED ring indicates an active microphone. Especially designed RF filters in the microphone head create a superb RF rejection.

The TMD/CL has an effective and robust shock mount system and comes with an integrated windshield. It has a highly flexible 2m cable connected to a robust NEUTRIK MINICON connector, matt black finish.

Low susceptibility to mobile phone interference, PDAs and other wireless devices operated within a conference room.

Technical Data

Complies with international standard IEC60914

Transducer Principle
Electret condenser

Directivity
cardioid

Frequency Response
100Hz - 20KHz

Sensitivity (free field, no load, 1 kHz)
-44 dB (0dB = 1V/Pa)

Output Impedance
1 kOhm

Max. SPL (Signal pressure level)
122 dB

Signal-to-noise Ratio
>72 dB (A-weighted, 1kHz)

Operating Voltage
5 VDC (1.5V ... 10V)

Indicator ring
colour red
Nominal current 20 mA (50 mA max.)

Connector
Neutrik Minicon, lockable

Dimensions
Total cable length 2 m
dia 16.0 mm

Weight
66 g

Optional

TMD/01
Conference Microphone 360mm, black.
(Article no. 01.0701)

WPF.01.0750.E.04022016